SPECIFICATIONS

Dot matrix Display点阵产品规格书





MODEL: TOP-CA-2088BSA

上海鼎辉科技股份有限公司

SHANGHAI TOPLITE TECHNOLOGY CO.,LTD.

www.ledtoplight.com.cn www.ledtoplite.com



SHANGHAI TOPLITE TECHNOLOGY CO.,LTD.

Http://www.ledtoplight.com.cn www.ledtoplite.com

TECHNICAL DATA SHEET TOP-CA-2088BSA

1/6

1. PRODUCT INTRODUCTION

- * Low power requirement,
- Solid state reliability.
- **%** Wide viewing angle.
- **X** Easy mounting on P.C. boards.
- **%** RoHS compliant.

2. FEATURES

- * TOP-CA-2088BSA is a 2.1 inch (53.3mm)matrix height 8×8 dot matrix display.
- * This device is made with white dots and black surface.

3. APPLICATION

- Digital readout display.
- **%** Instrument panels.
- **※** Elevator.

PART NO.	SIZE	CHIP EMITTED COLOR	FACE COLOR
TOP-CA-2088BSA	2.1 inch (53.3mm) matrix height	Amber	Black




SHANGHAI TOPLITE TECHNOLOGY CO.,LTD.


Http://www.ledtoplight.com.cn www.ledtoplite.com


TECHNICAL DATA SHEET TOP-CA-2088BSA


2/6


4. PACKAGE DIMENSIONS & CIRCUIT DIAGRAM













SHANGHAI TOPLITE TECHNOLOGY CO.,LTD. Http://www.ledtoplight.com.cn www.ledtoplite.com

TECHNICAL DATA SHEET TOP-CA-2088BSA

3/6

5. ELECTRICAL/OPTICAL CHARACTERISTIC

5-1. ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	VALUE	UNIT
Reverse Voltage	V_R	5	V/dot
Forward Current	I_{F}	30	mA/dot
Peak Forward Current (1/10 Duty Cycle)	I_{PEAK}	120	mA/dot
Power Dissipation	P_D	80	mW/dot
Operating Temperature Range	$T_{\mathbf{A}}$	- 25 ~ + 85	$^{\circ}$
Storage Temperature Range	$T_{ m STG}$	- 30 ~ + 85	$^{\circ}$ C
Solder Temperature	Tsol	260/3	°C/s

5-2. ELECTRICAL-OPTICAL CHARACTERISTICS (Ta=25°C)

PARAMETER	SYM	BOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
Luminous Intensity	IV	Т	26325	32907	39489	ucd	I _F =10mA
		U	39490	49362	59235		
		V	59236	74045	88854		
Forward Voltage	V_{F}		1.80	2.10	2.40	v/dot	I _F =20mA
Peak Emission Wavelength	λ _p		-	605	-	nm	I _F =20mA
Spectral Line Half-Width	Δλ		-	20	-	nm	I _F =20mA
Reverse Current	I_R		-	-	20	uA	V _R =5v




SHANGHAI TOPLITE TECHNOLOGY CO.,LTD.


Http://www.ledtoplight.com.cn www.ledtoplite.com


TECHNICAL DATA SHEET TOP-CA-2088BSA


4/6


5-3. OPTICAL CHARACTERISTIC CURVES

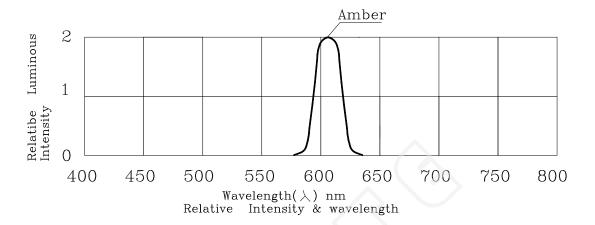











SHANGHAI TOPLITE TECHNOLOGY CO.,LTD.

 $Http://www.ledtoplight.com.cn \\ \qquad www.ledtoplite.com$

TECHNICAL DATA SHEET TOP-CA-2088BSA

5/6

6. QUALITY CONTROL AND ASSURANCE

CLASSIFICATION	TEST ITEM	TEST CONDITION		
ENDUTRANCE TEST	OPERATION LIFE	Ta=under room temperature If=12mA-25mA per segment or Ip=80mA/duty=1/8,Pw=1.25mS Ip=160mA/duty=1/16,Pw=1.mS(DOT) Test time=1000HRS(-24HRS+72HRS)		
	MOISTURE	Ta=65°C±5°C RH=90-95% Test time=240HRS±2HRS		
	HIGH TEMPERATURE HIGH HUMIDITY REVERSE BIAS	Ta=65°C±5°C RH=90-95% VR=5V Test time=500hrs(-24HRS+48HRS)		
	HIGH TEMPERATURE STORAGE	To evaluate device's durability for long term storage in high temperature Ta=85°C±5°C Test time=1000HRS(-24HRS+72HRS)		
	LOW TEMPERATURE STORAGE	Ta=-35°C±5°C Test time=1000HRS(-24HRS+72HRS)		
ENVIRONMENTAL TEST	TEMPERATURE CYCLING	Ta=85°C ~25°C ~-35°C time=30min 5min 30min 5min Cycle test:10cycles		
	THERMAL SHOCK	$Ta=85^{\circ}C\pm5^{\circ}C\sim-35^{\circ}C\pm5^{\circ}C$ time=10min 10min Cycle test:10cycles		
	SOLOER RESISTANCE	T.sol=260°C±5°C time=10±1sec		
	SOLOER ABILITY	T.sol=230°C±5°C time=5±1sec		



SHANGHAI TOPLITE TECHNOLOGY CO.,LTD.

Http://www.ledtoplight.com.cn www.ledtoplite.com

TECHNICAL DATA SHEET TOP-CA-2088BSA

6/6

7. SOLDERING CONDITIONS

The recommended conditions for soldering are as follows.


Because the component is made with epoxy resin, the units are susceptible to heat. Therefore, the preheating and soldering temperatures should be kept as low as possible to avoid damage.

7-1. Manual Soldering Conditions(with 1.5mm Iron tip).

Iron Tip Temperature: 350°C Max, Time: 3s Max.

Position: The iron should be situated at least 2mm away from the root of the leads.

7-2. Through the Wave Soldering Conditions Wave Soldering Profile For Lead-free Through-hole LED.

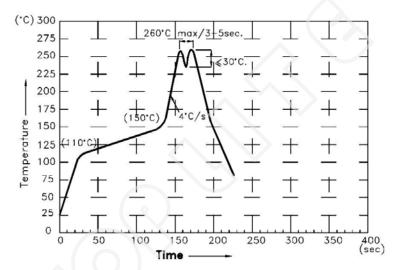

7-3. Soldering General Notes:

- a. Recommend manual soldering to be used only for repair and rework purposes. The soldering iron should not exceed 30W in power. The tip of the soldering iron should not touch the reflector case to avoid heat-damage.
- b. Maintain the pre-heat and peak temperatures with dip units as low as possible and the times as short as is feasible, since the products are susceptible to heat during flow soldering.
- c. After soldering, least three minutes for the component to cool to room temperature before further operations.
- d. If components will undergo multiple soldering processes, or other processes where the components may be subjected to intense heat, please check with for compatibility.